

Pressure Range

From: 20.60 bar g. (298.70 psi g.)
To: 134.50 bar g. (1950.25 psi g.)



Temperature Range

-50 °C to 200 °C (subject to seal material)



Flow Area

8.04 mm² (3.20 mm inlet bore diameter)



Connections

Inlet: 1/4" BSP, BSPT, NPT



Seal Materials

Nitrile
Viton®
Neoprene
Ethylene Propylene

GA 31180


		GA 31180
1	BODY	BRASS
2	SEAL	TO SUIT
3	SPRING	ST. STEEL
4	CAP	BRASS
5	PLUNGER	BRASS
6	SET SCREW	STEEL

Notes

- Relieving pressure is set pressure +10%
- Reseating pressure is set pressure -15%

Approvals

- BS EN ISO 4126-1
- PED 97/23/EC

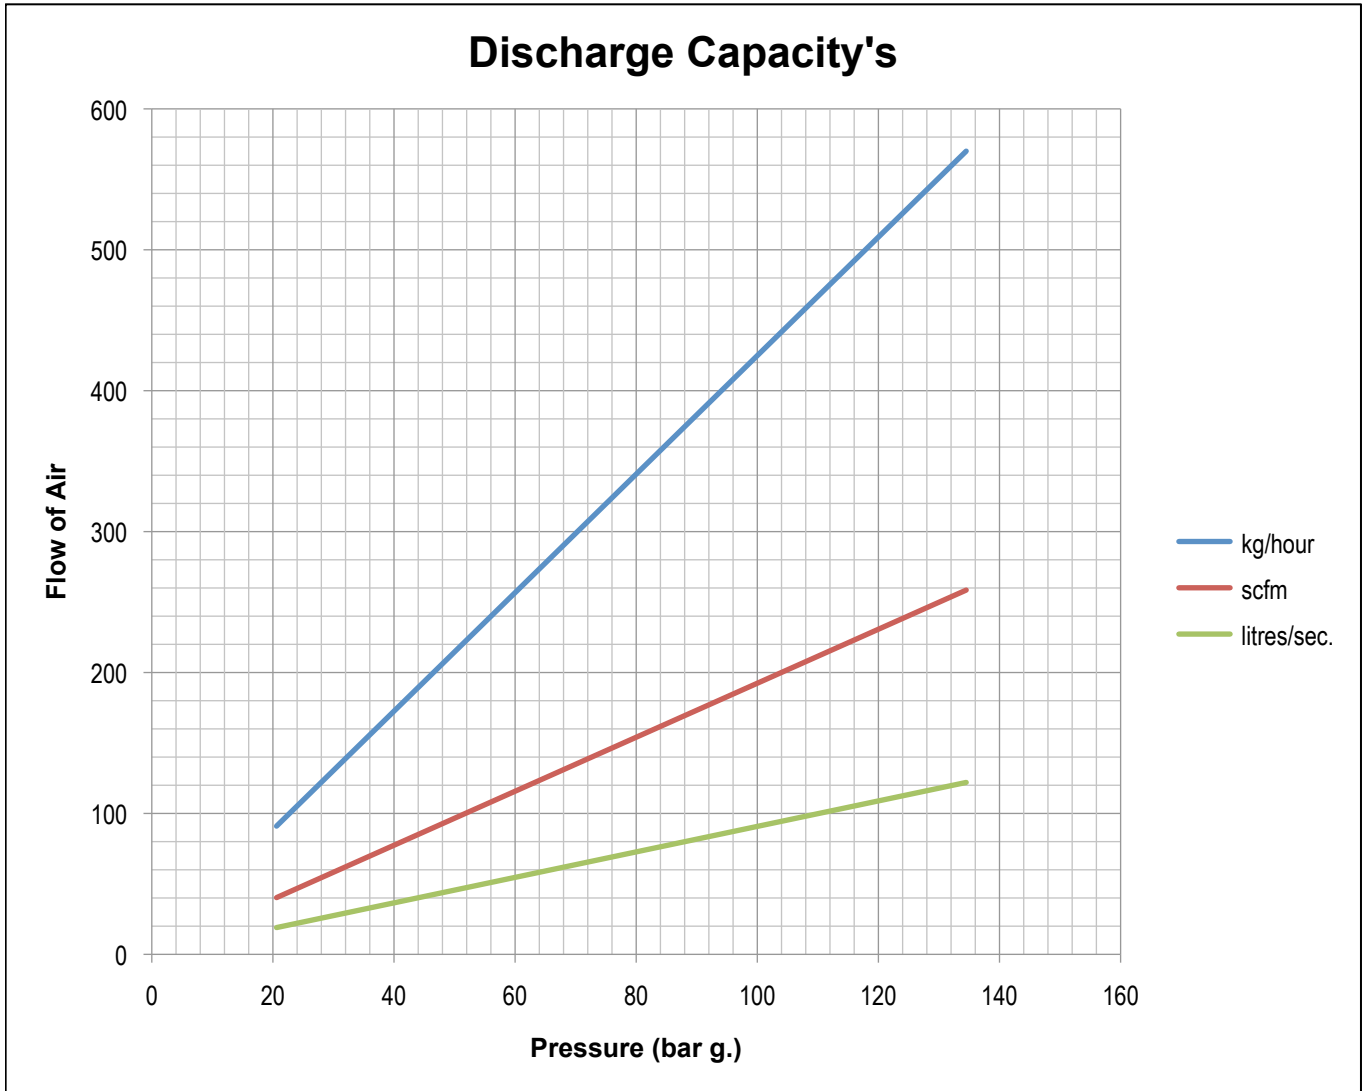

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.