

Pressure Range

From: 69.00 bar g. (1000.50 psi g.)
To: 448.20 bar g. (6498.90 psi g.)



Temperature Range

-50 °C to 180 °C (subject to seal material)



Flow Area

10.93 mm² (3.73 mm inlet bore diameter)



Connections

Inlet: 1/4" to 1/2" BSP, BSPT, NPT



Seal Materials

Nitrile
Viton®
Neoprene
Ethylene Propylene

		GA 55004
1	SEAT	ST. STEEL
2	PLUNGER	ST. STEEL
3	BALL	ST. STEEL
4	SPRING PAD	ST. STEEL
5	SPRING	ST. STEEL
6	BODY	BRASS
7	ADJUSTER	BRASS

Notes

- Relieving pressure is set pressure +10%
- Reseating pressure is set pressure -15%


Approvals

- BS EN ISO 4126-1
- PED 97/23/EC

DN4

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk

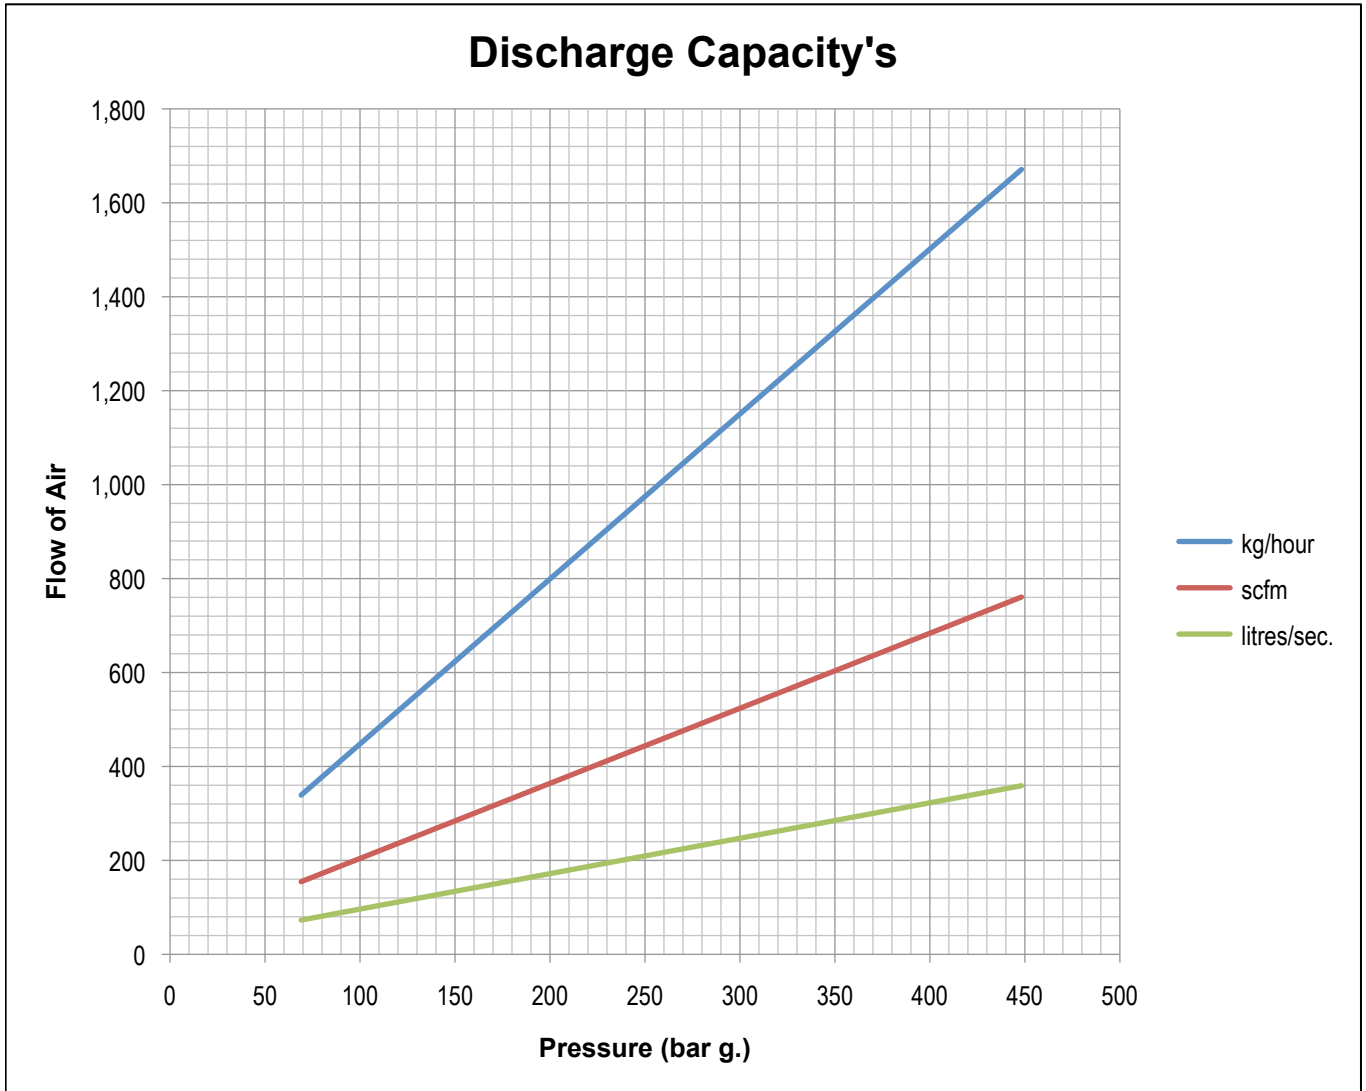

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

DN4

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk