

### Pressure Range

From: 2.30 bar g. (33.35 psi g.)  
To: 44.00 bar g. (638.00 psi g.)



### Temperature Range

-20 °C to 200 °C (subject to seal material)



### Flow Area

72.38 mm<sup>2</sup> (9.60 mm inlet bore diameter)



### Connections

Inlet: 3/8" to 3/4" BSP, BSPT, NPT



### Seal Materials

Nitrile  
Viton®  
Neoprene  
Ethylene Propylene

	GA 61610	GA 62610
1 INLET SEAT	BRASS	ST. STEEL
2 SEAL	TO SUIT	TO SUIT
3 SEAL RETAINER	BRASS	ST. STEEL
4 PLUNGER	BRASS	BRASS
5 BODY	BRASS	BRASS
6 SPRING	ST. STEEL	ST. STEEL
7 SPINDLE	ST. STEEL	ST. STEEL
8 ADJUSTER	BRASS	BRASS
9 LIFTING CAP	BRASS	BRASS
10 NAMEPLATE	ALUMINIUM ALLOY	ALUMINIUM ALLOY
11 WIRE & SEAL	ST. STEEL & LEAD	ST. STEEL & LEAD

### Notes

- Relieving pressure is set pressure +10%
- Reseating pressure is set pressure -10% (0.3 bar g. minimum)
- Stable operation on flows down to 50% of valve rated capacity


### Approvals

- TÜV Germany (AD-Merkblatt A2)
- BS EN ISO 4126-1
- PED 97/23/EC

# DN10


Seetru Limited  
Albion Dockside Works  
Bristol BS1 6UT  
England

Tel: +44 (0) 117 927 9204  
Fax: +44 (0) 117 929 8193  
sales@seetru.co.uk  
www.seetru.co.uk

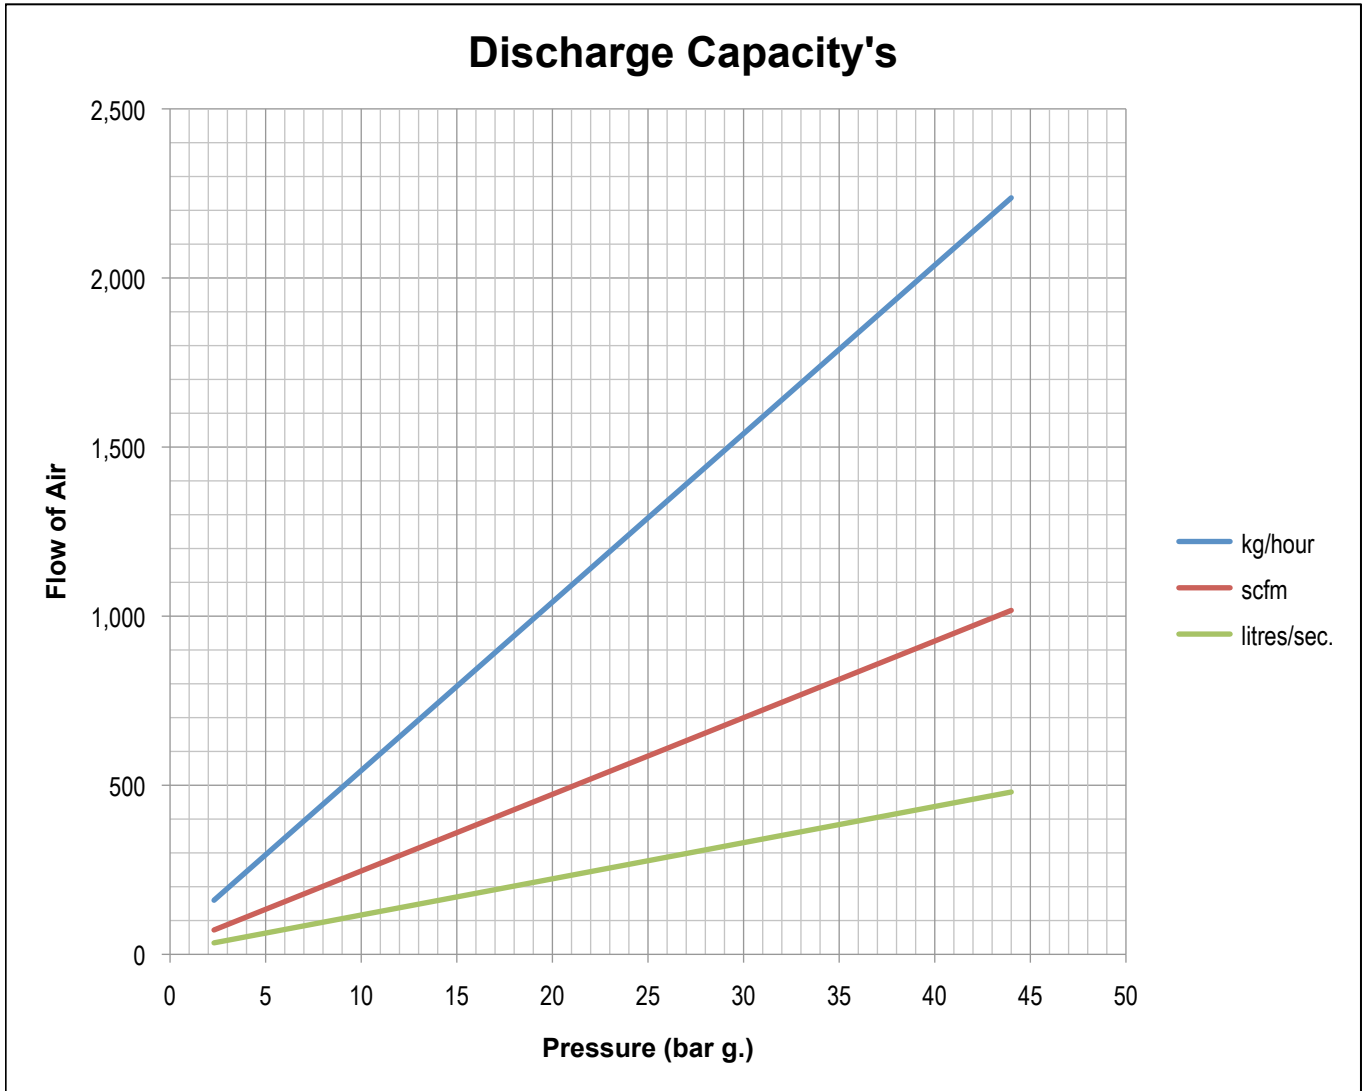

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

### Alternate Top Fittings

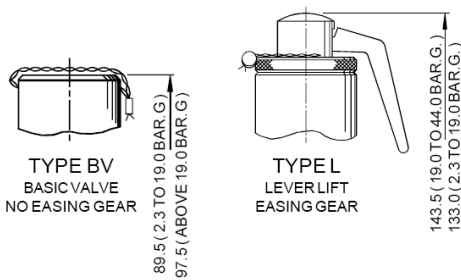

# DN10

Seetru Limited  
Albion Dockside Works  
Bristol BS1 6UT  
England

Tel: +44 (0) 117 927 9204  
Fax: +44 (0) 117 929 8193  
sales@seetru.co.uk  
www.seetru.co.uk