

Pressure Range

From: 2.80 bar g. (40.60 psi g.)
To: 41.40 bar g. (600.30 psi g.)



Temperature Range

-20 °C to 200 °C (subject to seal material)



Flow Area

132.73 mm² (13.00 mm inlet bore diameter)



Connections

Inlet: 3/4" to 1" BSP, BSPT, NPT



Seal Materials

Nitrile
Viton®
Neoprene
Ethylene Propylene

	GA 61613	GA 62613
1 INLET SEAT	BRASS	ST. STEEL
2 SEAL	TO SUIT	TO SUIT
3 SEAL RETAINER	BRASS	ST. STEEL
4 PLUNGER	BRASS	BRASS
5 BODY	BRASS	BRASS
6 SPRING	ST. STEEL	ST. STEEL
7 SPINDLE	ST. STEEL	ST. STEEL
8 ADJUSTER	BRASS	BRASS
9 LIFTING CAP	BRASS	BRASS
10 NAMEPLATE	ALUMINIUM ALLOY	ALUMINIUM ALLOY
11 WIRE & SEAL	ST. STEEL & LEAD	ST. STEEL & LEAD

Notes

- Relieving pressure is set pressure +10%
- Reseating pressure is set pressure -10% (0.3 bar g. minimum)
- Stable operation on flows down to 50% of valve rated capacity

Approvals


- TÜV Germany (AD-Merkblatt A2)
- BS EN ISO 4126-1
- PED 97/23/EC

DN13

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England


Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk

Discharge Capacity's

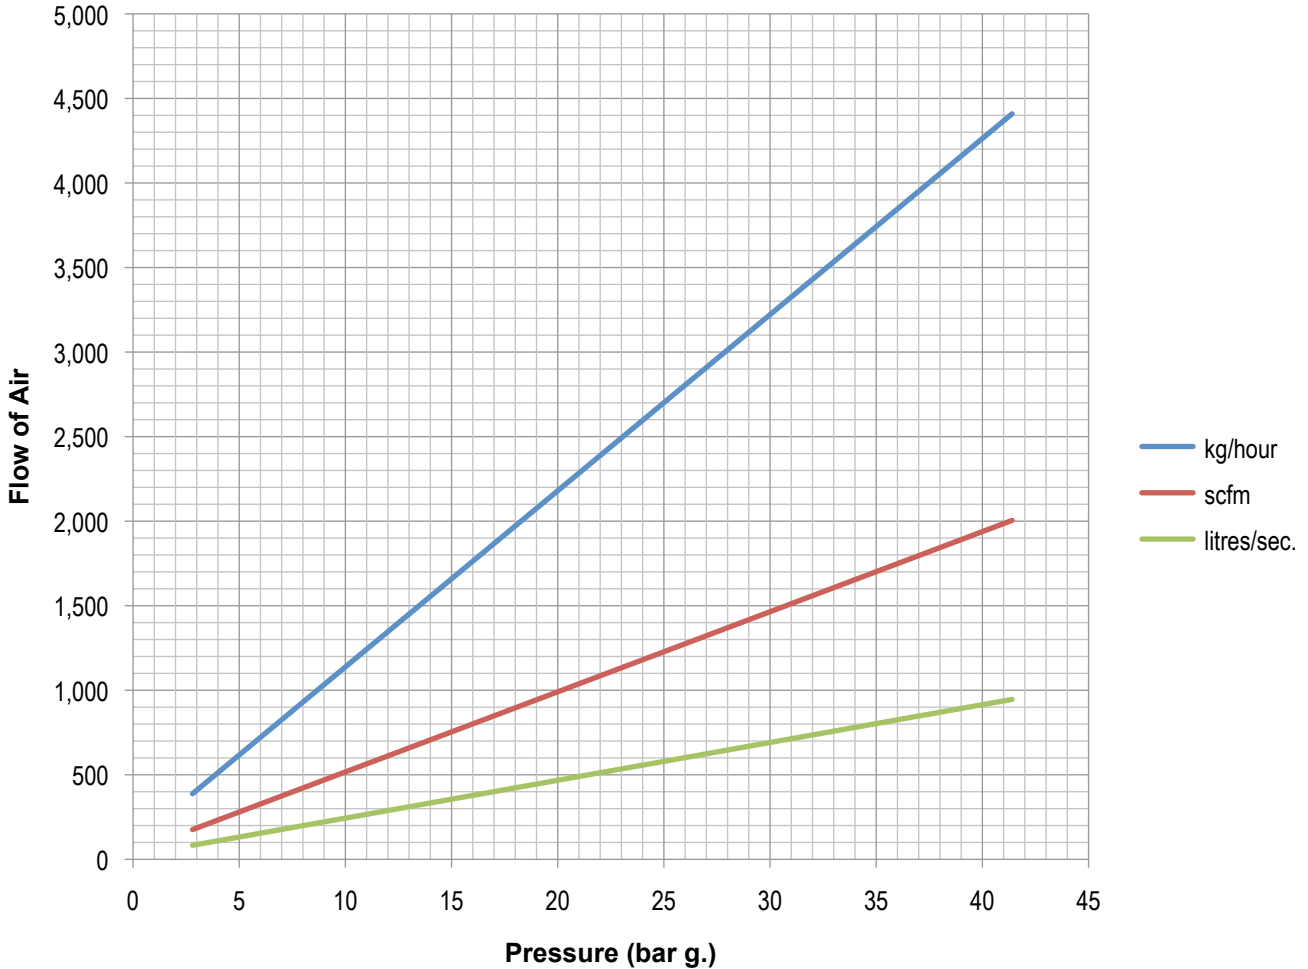

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

Alternate Top Fittings

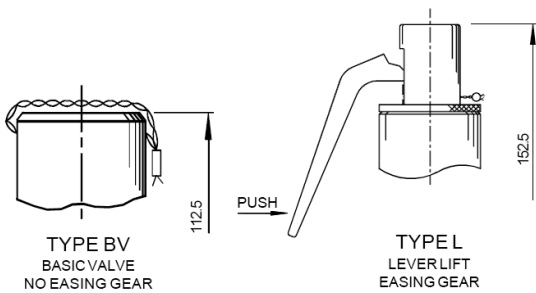

DN13

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk