

Pressure Range

From: 2.00 bar g. (29.00 psi g.)
To: 18.00 bar g. (261.00 psi g.)



Temperature Range

-20 °C to 200 °C (subject to seal material)



Flow Area

314.16 mm² (20.00 mm inlet bore diameter)



Connections

Inlet: 1" to 1 1/2" BSP, BSPT, NPT



Seal Materials

Nitrile
Viton®
Neoprene
Ethylene Propylene

	GA 61620	GA 62620
1 INLET SEAT	BRASS	ST. STEEL
2 SEAL	TO SUIT	TO SUIT
3 SEAL RETAINER	BRASS	ST. STEEL
4 PLUNGER	BRASS	BRASS
5 BODY	BRASS	BRASS
6 SPRING	ST. STEEL	ST. STEEL
7 SPINDLE	ST. STEEL	ST. STEEL
8 ADJUSTER	BRASS	BRASS
9 LIFTING CAP	BRASS	BRASS
10 O' RING	TO SUIT	TO SUIT
11 WIRE & SEAL	ST. STEEL & LEAD	ST. STEEL & LEAD

Notes

- Relieving pressure is set pressure +10%
- Reseating pressure is set pressure -10% (0.3 bar g. minimum)


Approvals

- TÜV Germany (AD-Merkblatt A2)
- BS EN ISO 4126-1
- PED 97/23/EC

DN20


Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk

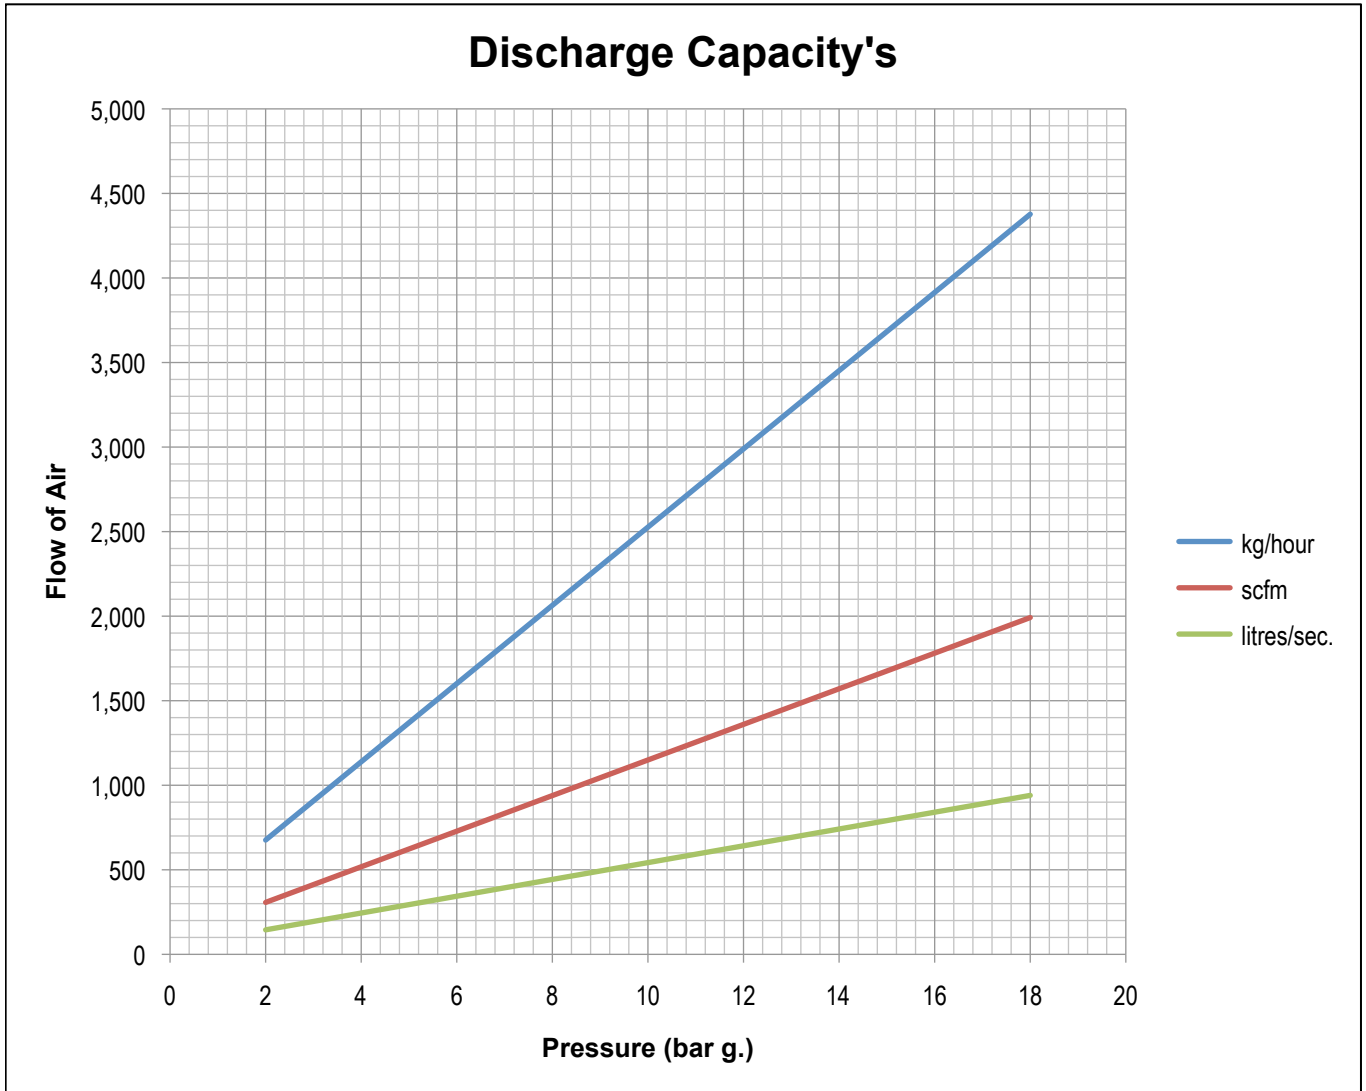

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

Alternate Top Fittings

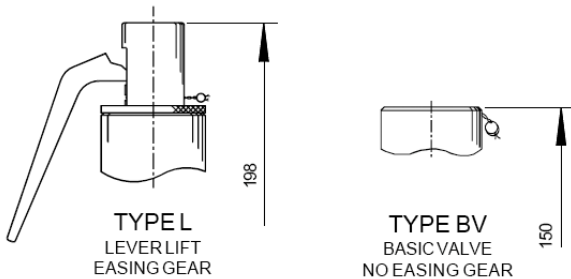

DN20

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk