

ILLUSTRATED SHOWING
TYPE R
CRIMPED ROTA-LIFT
EASING GEAR



Pressure Range

From: 0.27 bar g. (3.92 psi g.)
To: 17.50 bar g. (253.75 psi g.)



Temperature Range

-20 °C to 200 °C (subject to seal material)



Flow Area

49.02 mm² (7.90 mm inlet bore diameter)



Connections

Inlet: 1/4" to 1/2" BSP, BSPT, NPT



Seal Materials

Nitrile
Viton®
Neoprene
Ethylene Propylene

	GA 73008	GA 74008	GA 75008
1 BODY	BRASS CZ121	ST. STEEL	BRASS CZ132
2 SEAL	TO SUIT	TO SUIT	TO SUIT
3 PLUNGER	BRASS CZ121	ST. STEEL	BRASS CZ132
4 SPRING	ST. STEEL 1.4310 (302)	ST. STEEL 1.4310 (302)	ST. STEEL 1.4310 (302)
5 ADJUSTER	BRASS CZ121	ST. STEEL	BRASS CZ132
6 CAP	BRASS CZ121	ST. STEEL	-
7 NAMEPLATE	ALUMINIUM ALLOY	ALUMINIUM ALLOY	-

Notes

- Relieving pressure is set pressure +10% (0.1 bar g. below 1.0 bar g.)
- Reseating pressure is set pressure -10% (0.3 bar g. below 3.0 bar g.)


Approvals

- TÜV Germany (AD-Merkblatt A2)
- BS EN ISO 4126-1
- PED 97/23/EC

DN8



Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk

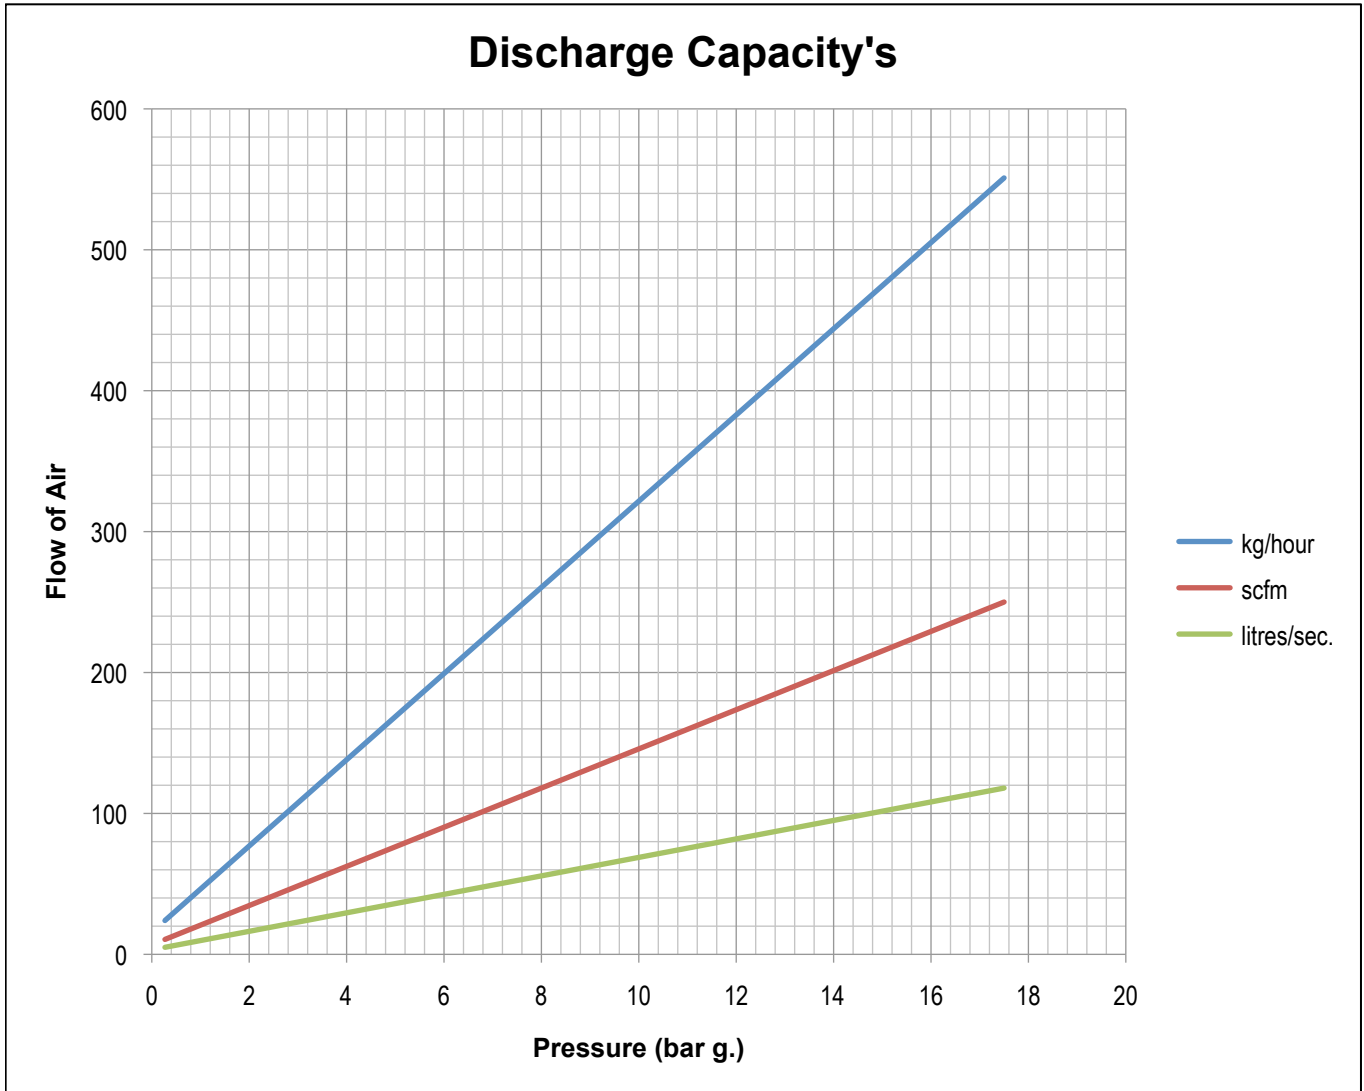

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

Alternate Top Fittings



DN8

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk