

Pressure Range

From: 2.80 bar g. (40.60 psi g.)
To: 21.00 bar g. (304.50 psi g.)



Temperature Range

-15 °C to 200 °C (subject to seal material)



Flow Area

132.73 mm² (13.00 mm inlet bore diameter)



Connections

Inlet: 1/2" to 3/4" BSP, BSPT, NPT



Seal Materials

Viton®

	ASME	GA 81713
	PED / TÜV / ASME	GA 81113
	PED / TÜV	GA 81813
1	BODY	BRASS CW614N
2	SEAL	VITON
3	VALVE DISC	BRASS CW614N
4	SPINDLE	ST. STEEL 1.4057 (431)
5	SPRING	ST. STEEL 1.4310 (302)
6	ADJUSTER	BRASS CW614N
7	LIFTING CAP	BRASS CW614N
8	NAME PLATE	ALUMINIUM ALLOY
9	WIRE & SEAL	ST. STEEL & LEAD

Notes

- Relieving pressure is set pressure +10%
- Reseating pressure is set pressure -10%


Approvals

- TÜV Germany (AD-Merkblatt A2)
- BS EN ISO 4126-1
- ASME Section VIII Division 1
- PED 97/23/EC

DN13


Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk

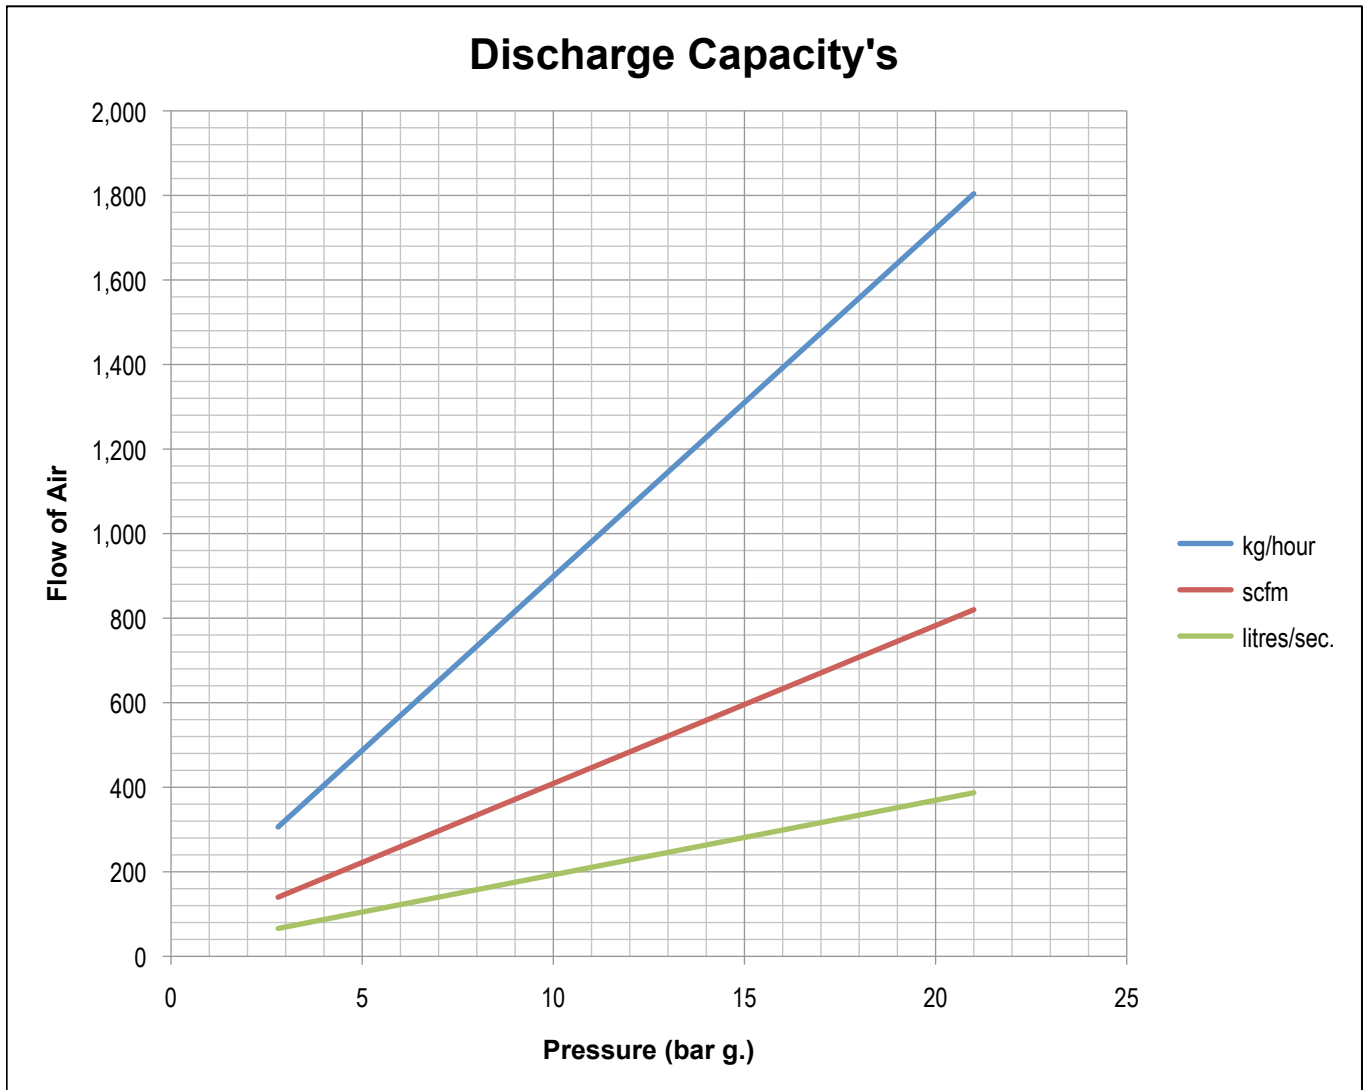

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

Alternate Fitting

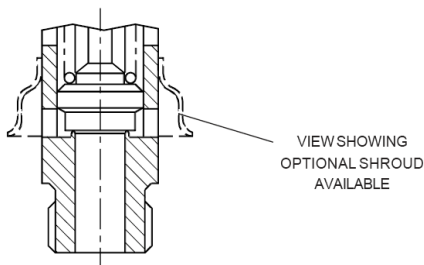

DN13

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk