

Pressure Range

From: 2.50 bar g. (36.25 psi g.)
To: 21.00 bar g. (304.50 psi g.)



Temperature Range

-15 °C to 200 °C (subject to seal material)



Flow Area

181.46 mm² (15.20 mm inlet bore diameter)



Connections

Inlet: 3/4" to 1" BSP, BSPT, NPT



Seal Materials

Viton®

		GA 81815
1	BODY	BRASS CZ121
2	SEAL	VITON
3	VALVE DISC	BRASS CZ121
4	SPINDLE	ST. STEEL
5	SPRING	ST. STEEL 1.4310 (302)
6	ADJUSTER	BRASS CZ121
7	LIFTING CAP	BRASS CZ121
8	NAME PLATE	ALUMINIUM ALLOY
9	WIRE & SEAL	ST. STEEL & LEAD

Notes

- Relieving pressure is set pressure +10%
- Reseating pressure is set pressure -10%


Approvals

- TÜV Germany (AD-Merkblatt A2)
- BS EN ISO 4126-1
- PED 97/23/EC

DN15


Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk

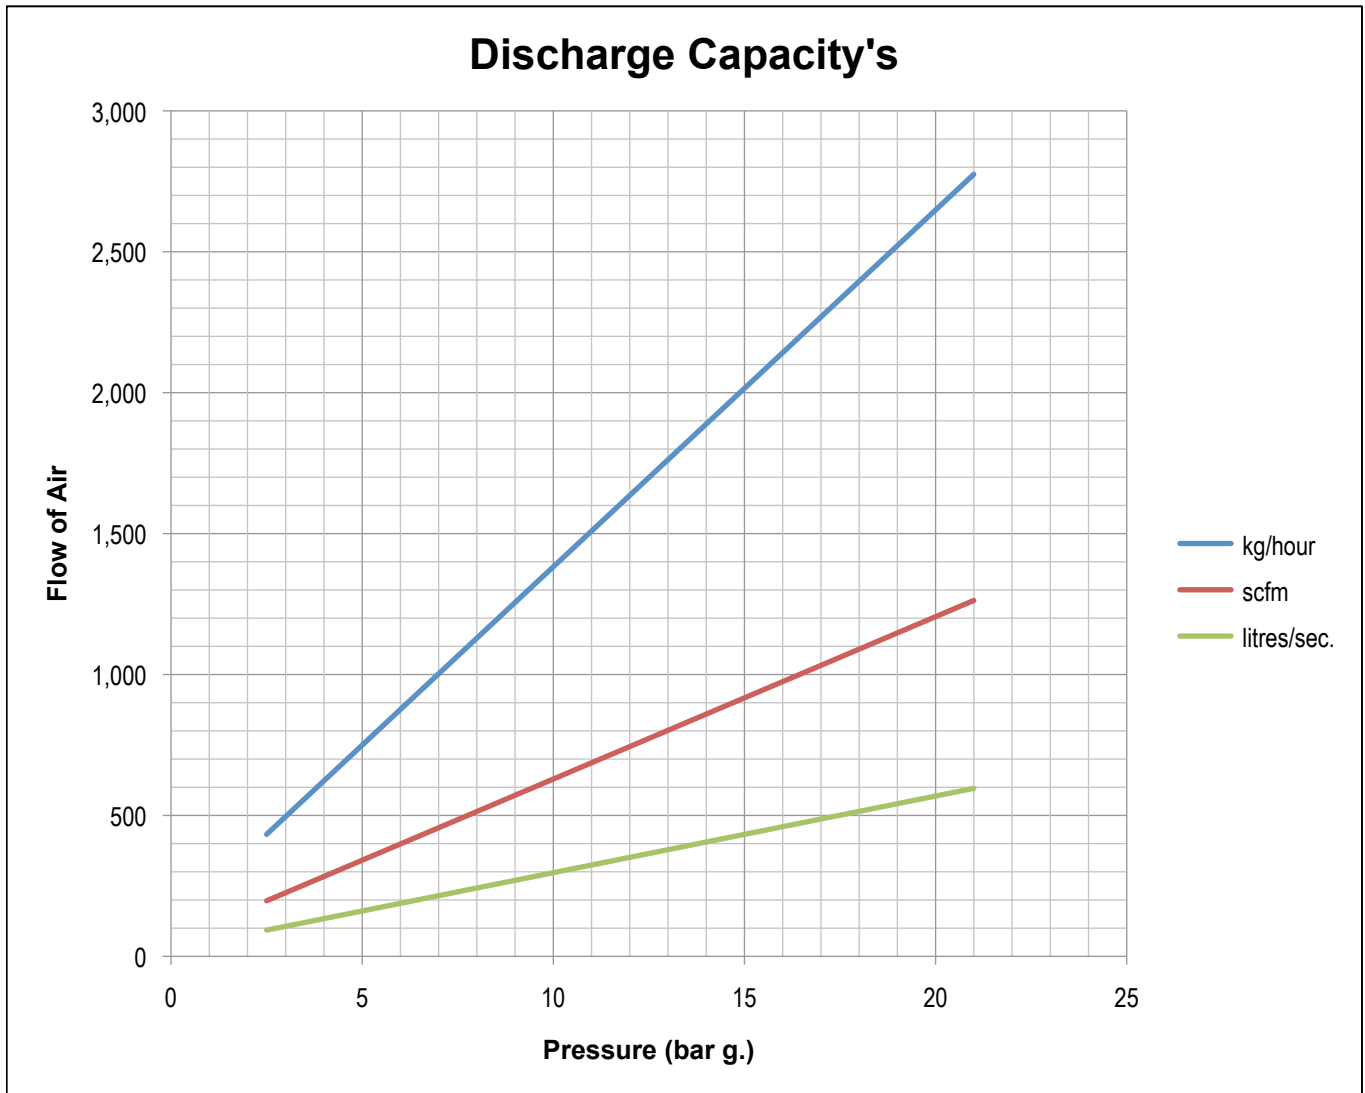

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

Alternate Fitting

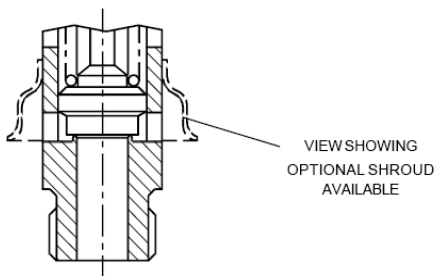

DN15

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk