

ILLUSTRATED SHOWING  
TYPE BV  
BASIC WIRELOCK  
NO EASING GEAR



### Pressure Range

From: 48.00 bar g. (696.00 psi g.)  
To: 241.00 bar g. (3494.50 psi g.)



### Temperature Range

-50 °C to 200 °C (subject to seal material)



### Flow Area

10.52 mm<sup>2</sup> (3.66 mm inlet bore diameter)



### Connections

Inlet: 3/8" to 1/2" BSP, NPT  
Outlet: 3/8" to 1/2" BSP, NPT



### Seal Materials

Nitrile  
Viton®

	GP 33110	GP 34110	GP 34410
1 SEAT	ST. STEEL	ST. STEEL	ST. STEEL (316)
2 BODY	BRASS	ST. STEEL	ST. STEEL (316)
3 SEAL	TO SUIT	TO SUIT	TO SUIT
4 PLUNGER	ST. STEEL	ST. STEEL	ST. STEEL (316)
5 SPINDLE	ST. STEEL	ST. STEEL	ST. STEEL (316)
6 SPRING	ST. STEEL	ST. STEEL	ST. STEEL
7 ADJUSTER	BRASS	ST. STEEL	ST. STEEL (316)
8 WIRELOCKING	ST. STEEL & LEAD	ST. STEEL & LEAD	ST. STEEL & LEAD
9 CAP	BRASS	ST. STEEL	ST. STEEL (316)

### Notes

- Relieving pressure is set pressure +10%
- Reseating pressure is set pressure -10%


### Approvals

- BS EN ISO 4126-1
- PED 97/23/EC

# 1/8"

Seetru Limited  
Albion Dockside Works  
Bristol BS1 6UT  
England

Tel: +44 (0) 117 927 9204  
Fax: +44 (0) 117 929 8193  
sales@seetru.co.uk  
www.seetru.co.uk

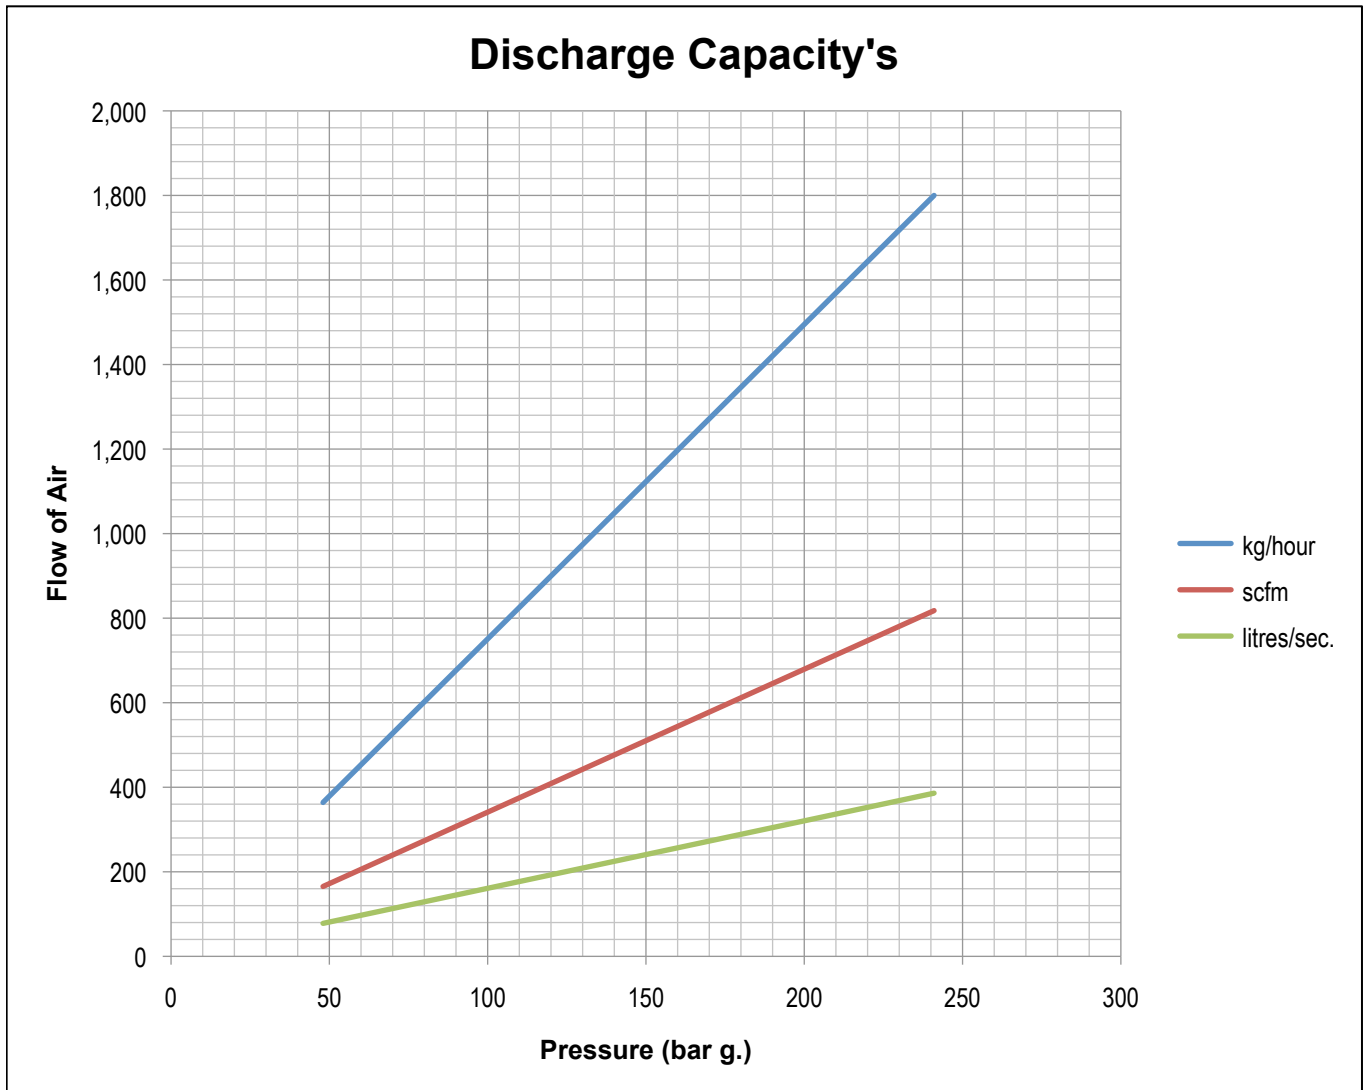

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

**1/8"**

Seetru Limited  
Albion Dockside Works  
Bristol BS1 6UT  
England

Tel: +44 (0) 117 927 9204  
Fax: +44 (0) 117 929 8193  
sales@seetru.co.uk  
www.seetru.co.uk