

Pressure Range

From: 35.00 bar g. (507.50 psi g.)
To: 500.00 bar g. (7250.00 psi g.)



Temperature Range

0 °C to 200 °C (subject to seal material)



Flow Area

16.62 mm² (4.60 mm inlet bore diameter)



Connections

Inlet: 3/8" to 1/2" BSP, BSPT
Outlet: 1/2" BSP



Seal Materials

Stainless Steel Ball

		GP359
1	SEAT	ST. STEEL
2	BODY	ST. STEEL
3	BALL	ST. STEEL
4	PLUNGER	ST. STEEL
5	SPRING	ST. STEEL
6	ADJUSTER	ST. STEEL
7	CAP	ST. STEEL
8	'O' RING	VITON
9	COVER	ST. STEEL
10	WIRE & SEAL	ST. STEEL & LEAD

Notes

- Maximum permissible built up back pressure is 10% of set pressure
- Relieving pressure is set pressure +10%
- Reseating pressure is set pressure -10%


Approvals

- BS EN ISO 4126-1
- PED 97/23/EC

DN5

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk

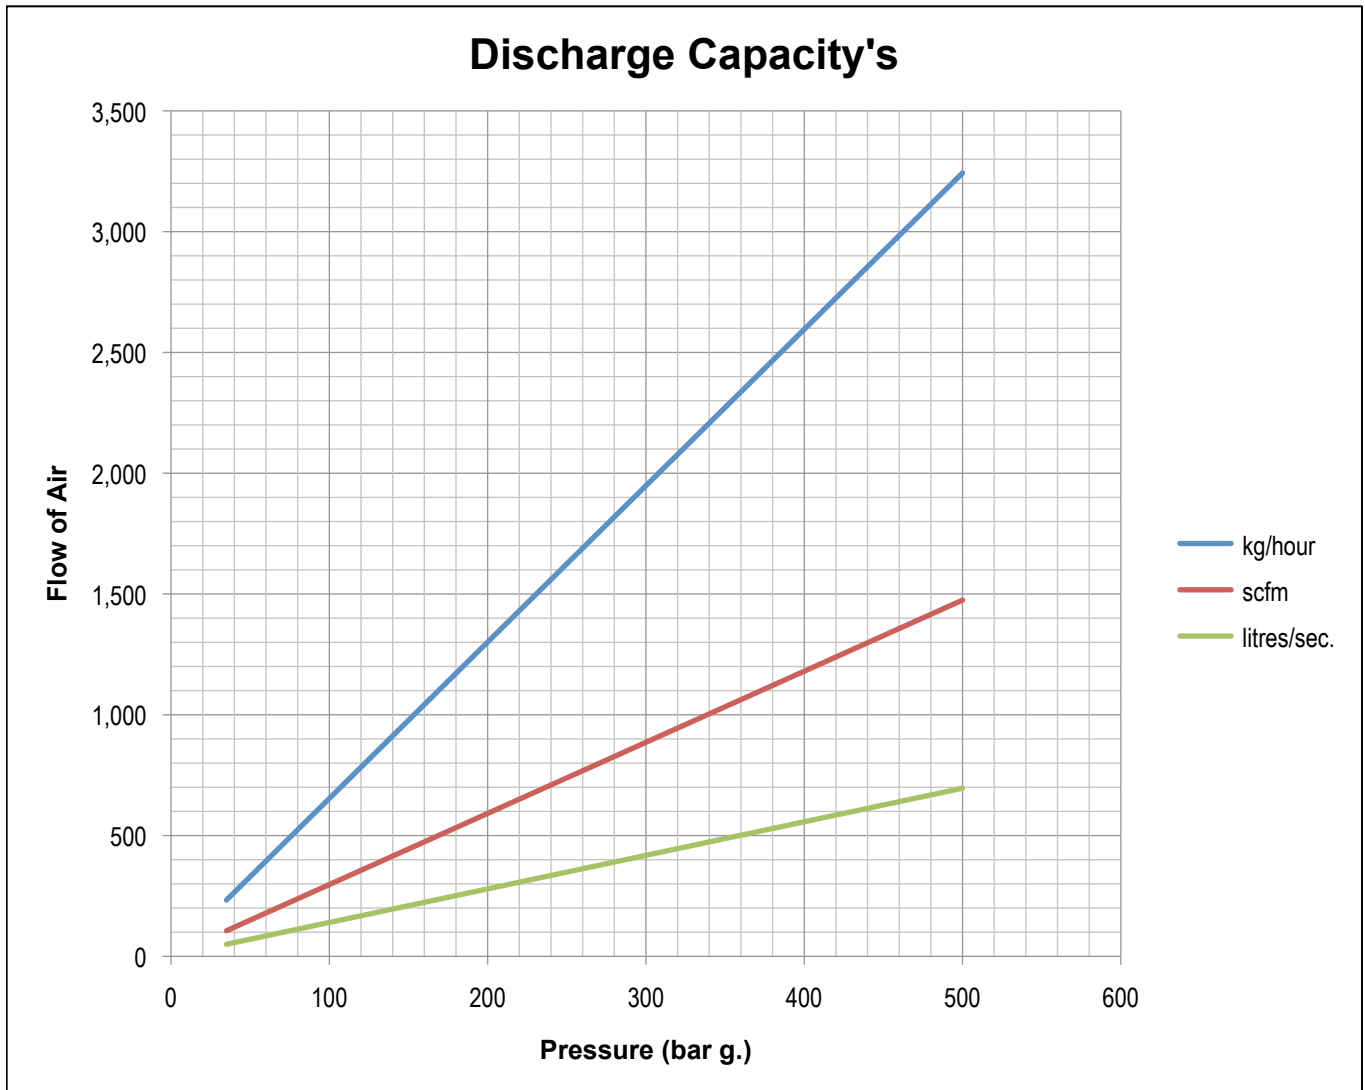

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

DN5

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk