

ILLUSTRATED SHOWING  
TYPE R  
CRIMPED ROTA-LIFT  
EASING GEAR



### Pressure Range

From: 0.30 bar g. (4.35 psi g.)  
To: 13.20 bar g. (191.40 psi g.)



### Temperature Range

-20 °C to 180 °C (subject to seal material)



### Flow Area

49.02 mm<sup>2</sup> (7.90 mm inlet bore diameter)



### Connections

Inlet: 1/4" to 1/2" BSP, BSPT, NPT  
Outlet: 3/8" BSP



### Seal Materials

Nitrile  
Viton®  
Neoprene  
Ethylene Propylene

		GP 63608
1	BODY	BRASS CZ132
2	ADJUSTER	BRASS CZ132
3	PLUNGER	BRASS CZ132
4	RETAINING CLIP	ZINC PLATED
5	SPRING	ST. STEEL 1.4310 (302)
6	DISC SEAL	TO SUIT
7	RELIEVING SCREW	BRASS CZ132
8	O' RING	AS DISC SEAL
9	PIPE COLLAR	PPS 40% GLASS FILLED

### Notes

- Maximum permissible built up back pressure is 10% of set pressure
- Relieving pressure is set pressure +10% (0.1 bar g. below 1 bar g.)
- Reseating pressure is set pressure -10% (0.3 bar g. minimum)


### Approvals

- TÜV Germany (AD-Merkblatt A2)
- BS EN ISO 4126-1
- PED 97/23/EC

# DN8

Seetru Limited  
Albion Dockside Works  
Bristol BS1 6UT  
England

Tel: +44 (0) 117 927 9204  
Fax: +44 (0) 117 929 8193  
sales@seetru.co.uk  
www.seetru.co.uk

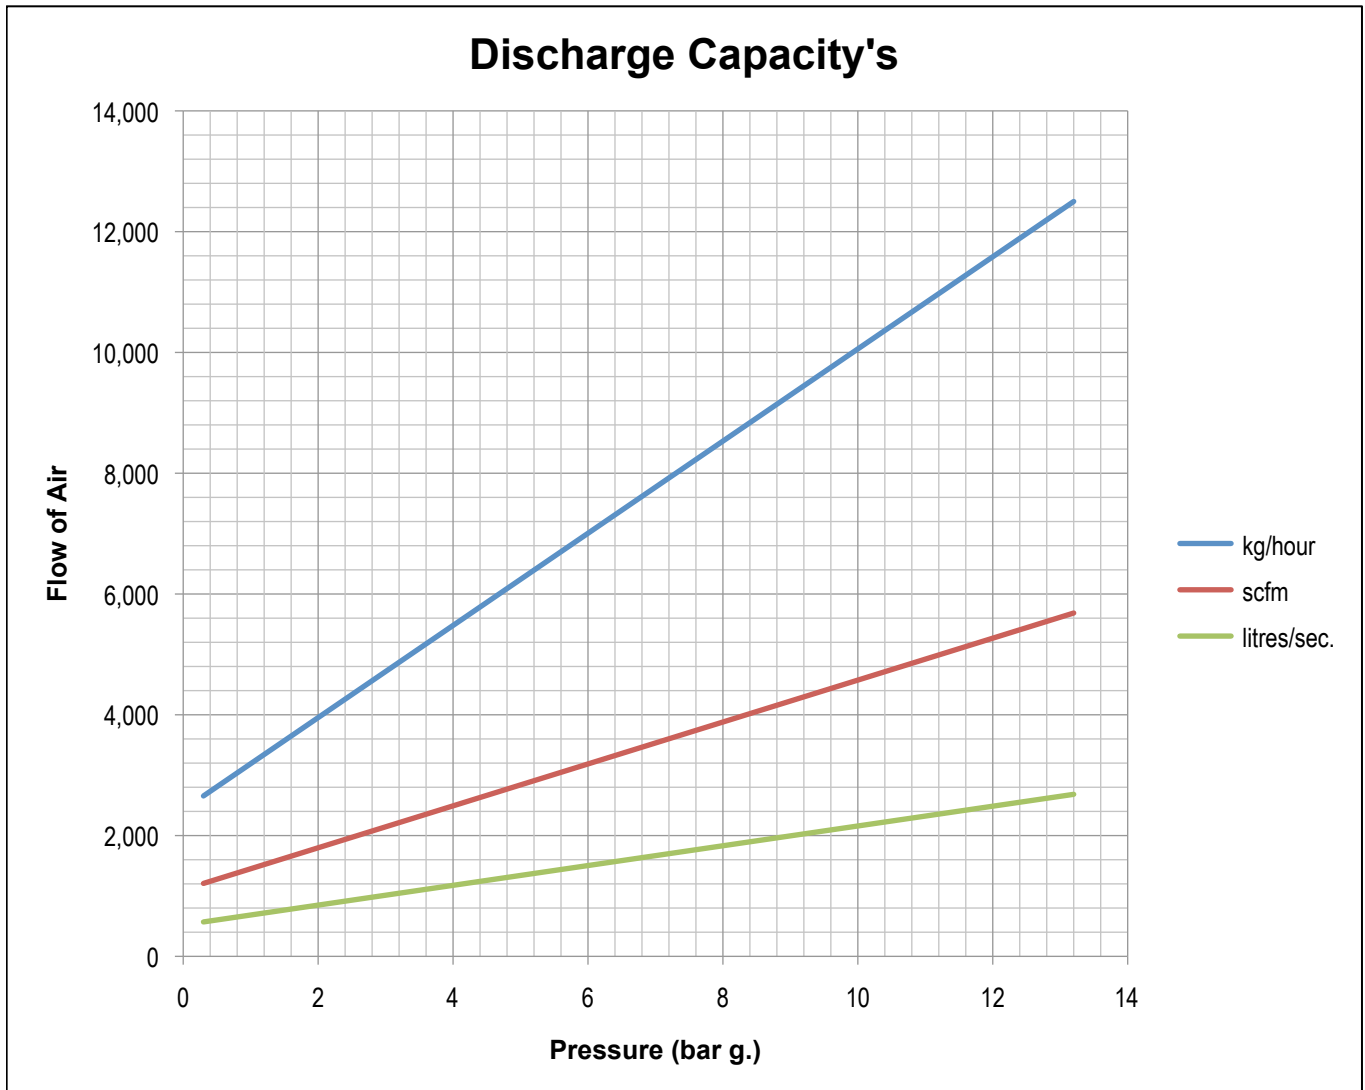

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.