

ILLUSTRATED SHOWING
TYPE S
NOEASING GEAR



Pressure Range

From: 0.70 bar g. (10.15 psi g.)
To: 27.00 bar g. (391.50 psi g.)



Temperature Range

Up to: 200 °C (subject to seal material)



Flow Area

147.41 mm² (13.70 mm inlet bore diameter)



Connections

Inlet: 3/4" BSP, BSPT, NPT
Outlet: 1" BSP



Seal Materials

Nitrile
Viton®
Neoprene
Ethylene Propylene

	LP 67013	LP 68013	LP 69013
1 INLET SEAT	BRASS	ST. STEEL	ST. STEEL
2 SEAL RETAINER	BRASS	ST. STEEL	ST. STEEL
3 SEAL	TO SUIT	TO SUIT	TO SUIT
4 PLUNGER	BRASS	ST. STEEL	BRASS
5 BODY	BRASS	ST. STEEL	BRASS
6 SPRING	ST. STEEL	ST. STEEL	ST. STEEL
7 SPINDLE	ST. STEEL	ST. STEEL	ST. STEEL
8 ADJUSTER	BRASS	ST. STEEL	BRASS
9 CAP	BRASS	ST. STEEL	BRASS
10 WIRE & SEAL	ST. STEEL & LEAD	ST. STEEL & LEAD	ST. STEEL & LEAD
11 COVER	BRASS	ST. STEEL	BRASS

Notes

- Relieving pressure is set pressure +25%
- Reseating pressure is set pressure -20% (0.6 bar g. below 3 bar g.)



Approvals

- TÜV Germany (AD-Merkblatt A2)
- BS EN ISO 4126-1
- PED 97/23/EC

DN13


Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk

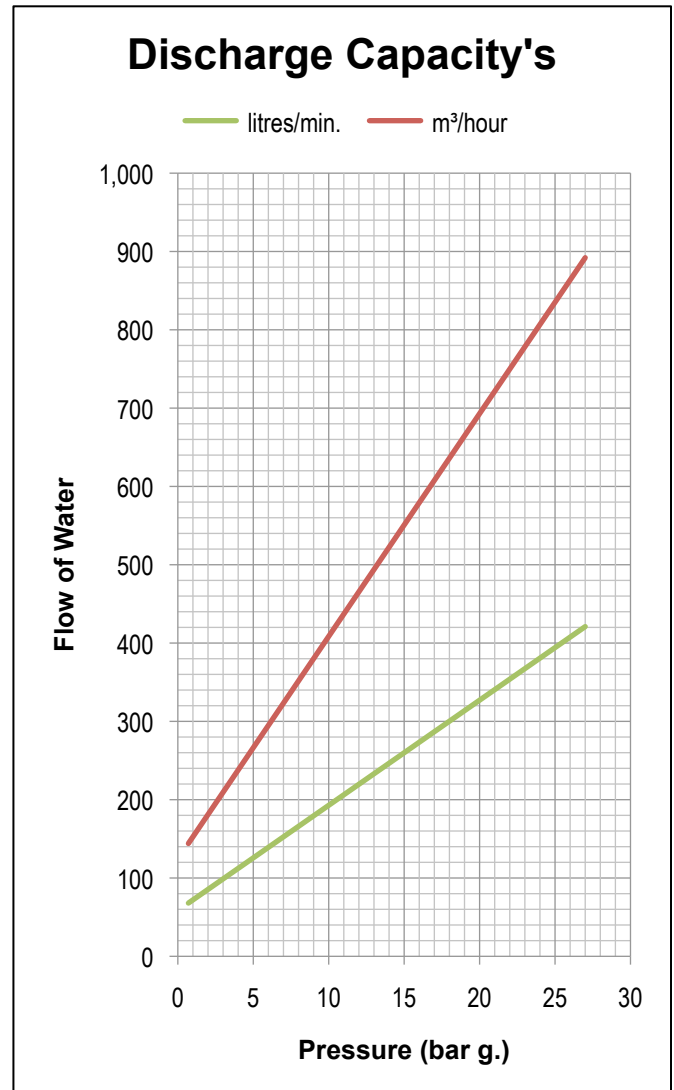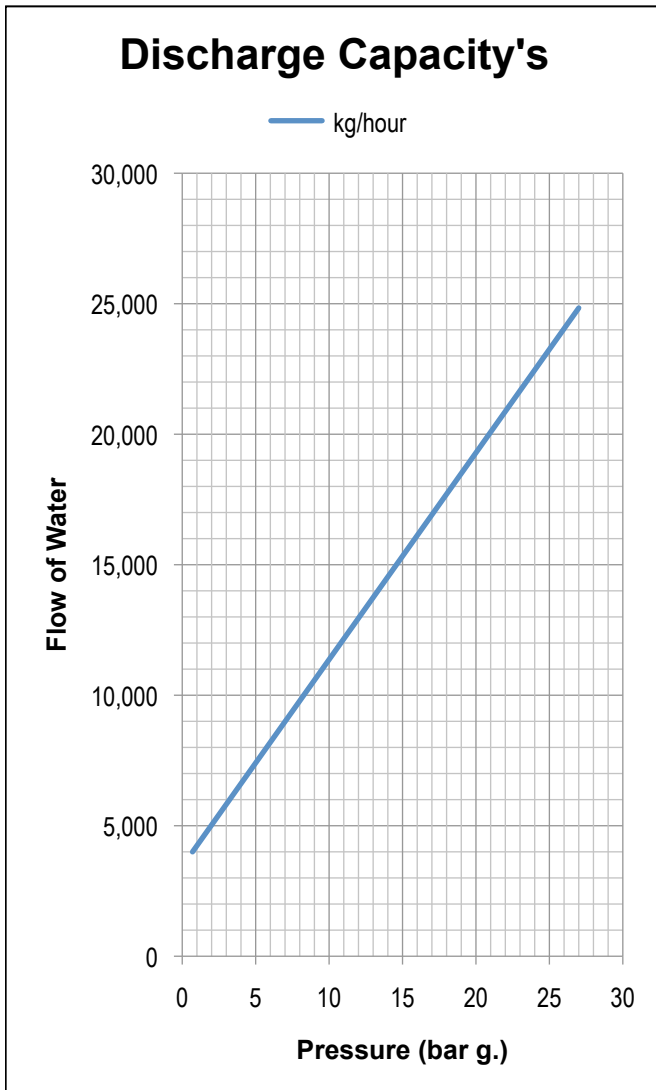


For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

Alternate Top Fittings



TYPE SL
SEALED LEVER
EASING GEAR



TYPE R
ROTA-LIFT
EASING GEAR

DN13

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk