


# LP 97010 (METAL SEAL)

10 mm Nominal Bore Piped Discharge Safety Relief Valve  
For Liquids  
PED, TÜV Approved

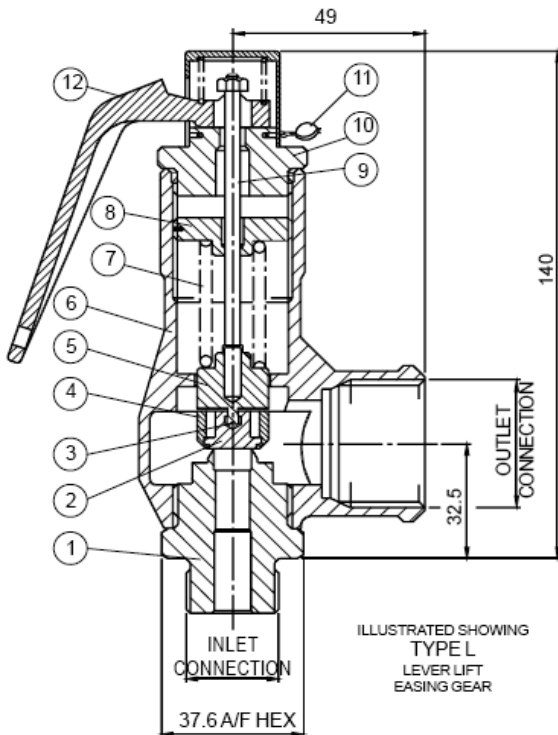

### Pressure Range

From: 0.30 bar g. (4.35 psi g.)  
To: 28.00 bar g. (406.00 psi g.)



### Temperature Range

Up to: 250 °C



### Flow Area

78.54 mm<sup>2</sup> (10.00 mm inlet bore diameter)



### Connections

Inlet: 1/2" to 3/4" BSP, BSPT, NPT  
Outlet: 1" BSP, NPT



### Seal Materials

Nitrile  
Viton®  
Neoprene  
Ethylene Propylene  
Silicone

	LP 97010	LP 98010
1 INLET SEAT	BRASS	ST. STEEL
2 DISC	ST. STEEL 1.4401 (316)	ST. STEEL 440B
3 BALL	ST. STEEL	ST. STEEL
4 DISC HOLDER	ST. STEEL	ST. STEEL
5 PLUNGER	ST. STEEL	ST. STEEL
6 BODY	BRASS	ST. STEEL
7 SPRING	ST. STEEL	ST. STEEL
8 ADJUSTER	BRASS	ST. STEEL
9 SPINDLE	ST. STEEL	ST. STEEL
10 CAP	BRASS	ST. STEEL
11 WIRE & SEAL	ST. STEEL & LEAD	ST. STEEL & LEAD
12 LEVER	BRASS	ST. STEEL

### Notes

- Relieving pressure is set pressure +10%
- Reseating pressure is set pressure -20% (0.6 bar g. below 3.0 bar g.)
- Leak tightness at 90% set pressure to API 527
- Greater leak tightness may be achieved on request

### Approvals

- TÜV Germany (AD-Merkblatt A2)
- BS EN ISO 4126-1
- PED 97/23/EC



# DN10

Seetru Limited  
Albion Dockside Works  
Bristol BS1 6UT  
England

Tel: +44 (0) 117 927 9204  
Fax: +44 (0) 117 929 8193  
sales@seetru.co.uk  
www.seetru.co.uk


# LP 97010 (METAL SEAL)

10 mm Nominal Bore Piped Discharge Safety Relief Valve  
For Liquids  
PED, TÜV Approved

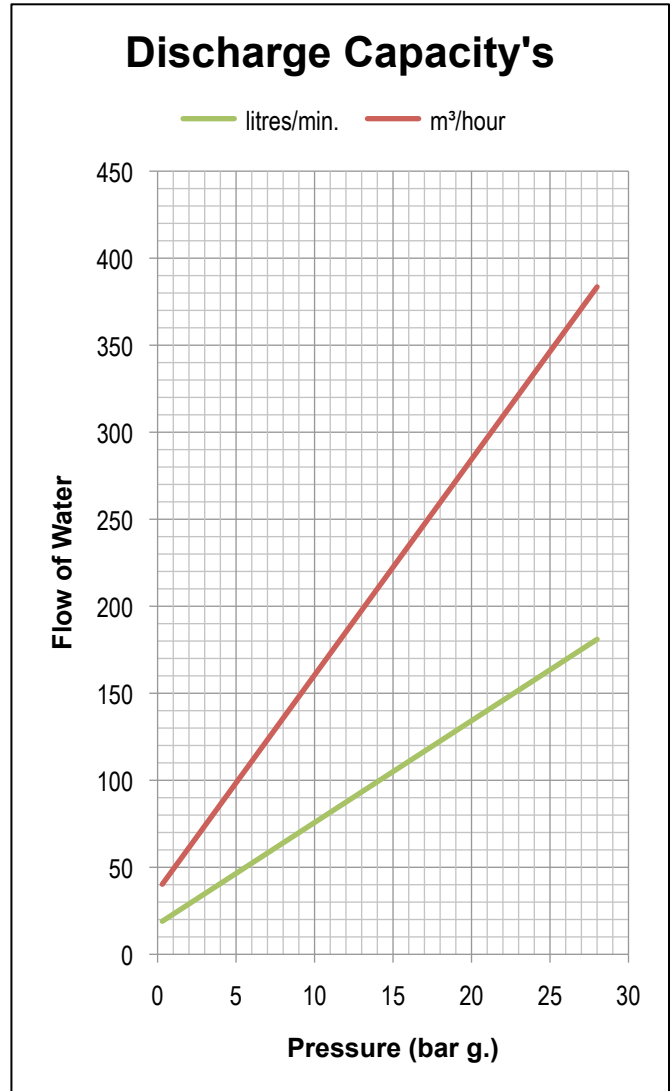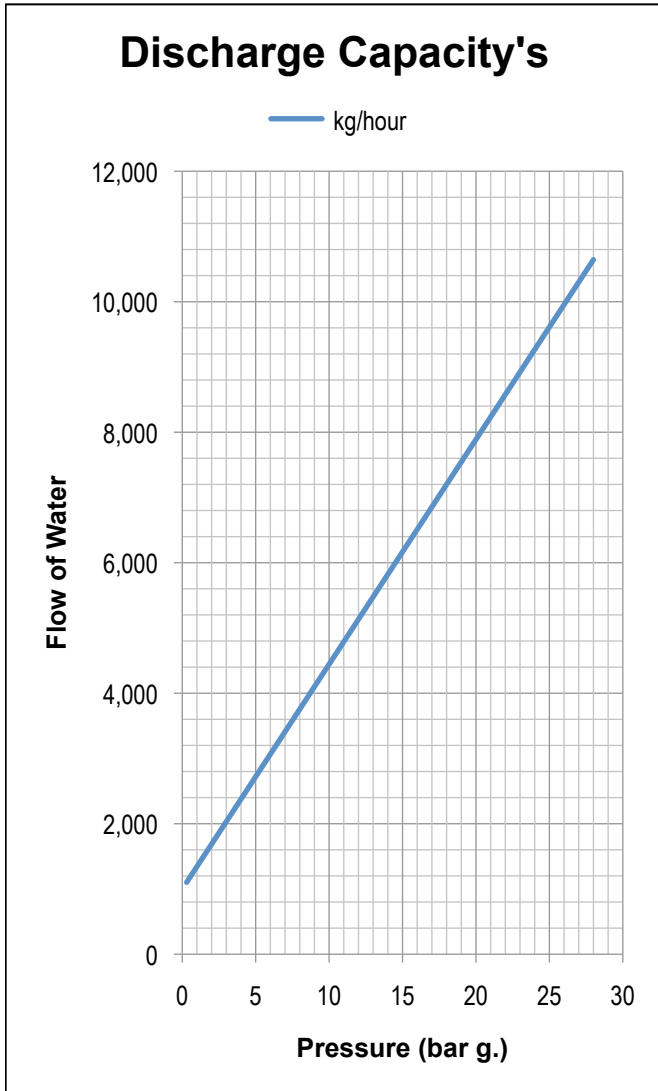

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

## Alternate Top Fittings

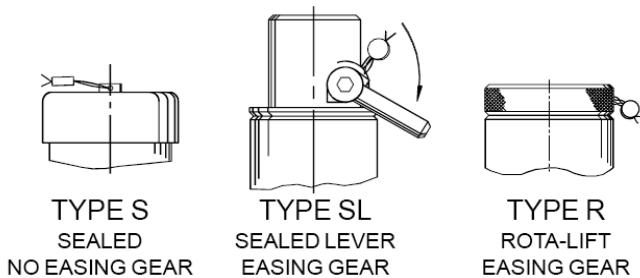

# DN10

Seetru Limited  
Albion Dockside Works  
Bristol BS1 6UT  
England

Tel: +44 (0) 117 927 9204  
Fax: +44 (0) 117 929 8193  
sales@seetru.co.uk  
www.seetru.co.uk