

Pressure Range

From: 2.80 bar g. (40.60 psi g.)
To: 9.40 bar g. (136.30 psi g.)



Temperature Range

-20 °C to 200 °C (subject to seal material)



Flow Area

1104.47 mm² (37.50 mm inlet bore diameter)



Connections

Inlet: 2" to 2 1/2" BSP, BSPT



Seal Materials

Nitrile
Viton®
Neoprene
Ethylene Propylene

		GA 31140
1	BODY	BRASS
2	PLUNGER	BRASS
3	SPINDLE	ST. STEEL
4	SPRING	ST. STEEL
5	CAP	BRASS
6	ADJUSTER	BRASS
7	KNOB	PLASTIC

Notes

- Relieving pressure is set pressure +10% (0.1 bar g. below 1 bar g.)
- Reseating pressure is set pressure -10% (-0.3 bar g. below 2 bar g.)


Approvals

- TÜV Germany (AD-Merkblatt A2)
- BS EN ISO 4126-1
- PED 97/23/EC

DN40

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk

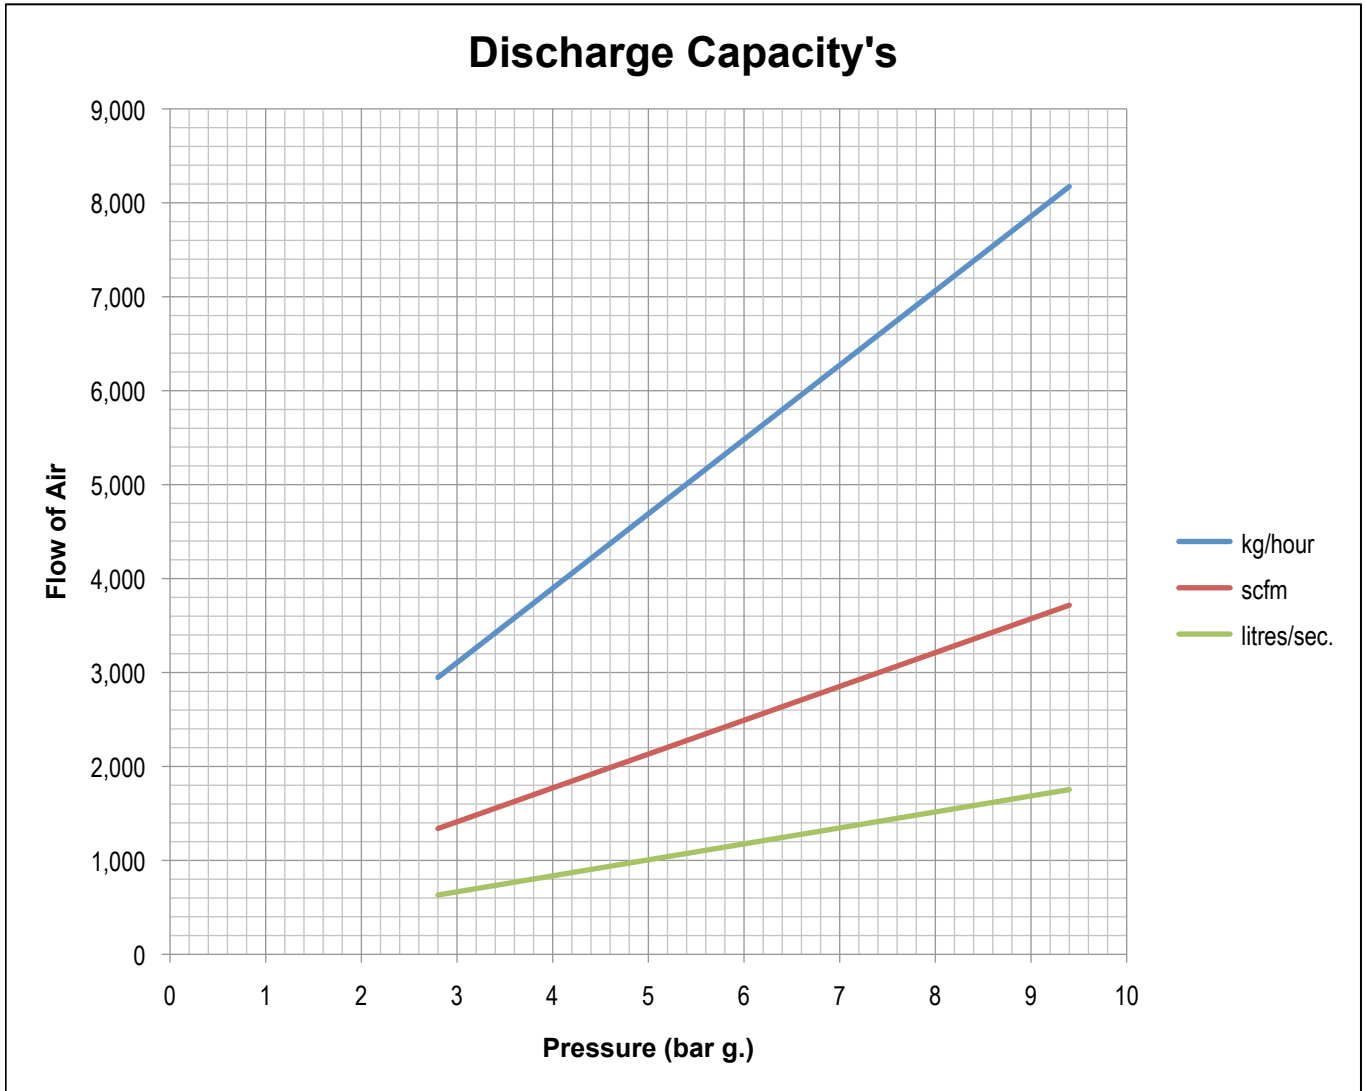

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

DN40

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk